


# Beading and Sequin Foot

#C15  
Overlocker

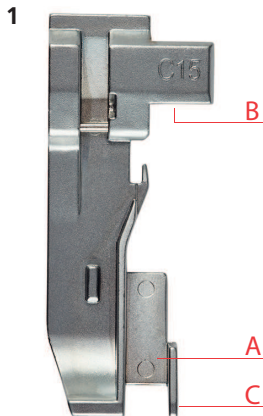

## Information

### Purpose

- To attach strands of beads and sequins up to a diameter of 6 mm.

### For your safety

Before using this accessory, please read this instruction manual as well as the instruction manual of your machine carefully.

### Marking and guides

- A Front guide groove
- B Rear guide groove
- C Foot edge / cutting width 6

## Application

### Attaching a strand of beads along the fabric edge

- > Select the 3-thread rolled hem and thread the machine. For beads with a diameter larger than 4 mm, the stitch can be sewn with the left needle (LN).
- > Adjust the stitch length according to the diameter of the beads.
- > Adjust the cutting width according to the diameter of the beads.
- > Raise the presser foot; place the strands of beads in the front guide groove and under the rear guide groove. (Fig. 2)
- > To secure the strand of beads, lower the presser foot and sew a few stitches.
- > Place the fabric under the presser foot and the strand of beads (with the right side up) so that the extra seam allowance is cut. (Fig. 3)
- > Attach the strand of beads. Make sure that the fabric as well as the strand of beads are fed evenly. If necessary, adjust the differential feed.

### Sewing on a strand of sequins along a fabric edge

- > Select a 3-thread overlock stitch wide (LN) and thread the machine.
- > Adjust the stitch length to 2.5 – 4 mm.
- > Adjust the cutting width according to the diameter of the sequins.
- > Raise the presser foot, place the strands of sequins in the front guide groove and under the rear guide groove. The 'nap' of the sequins should face away from the foot to ensure smooth feeding.
- > To secure the sequins, lower the presser foot and sew a few stitches.
- > Place the fabric under the presser foot and the strand of sequins (with the right side up) so that the extra seam allowance is cut.
- > Attach the strand of sequins. (Fig. 4)
- > To hide the looper threads beneath the sequins, pull the sequins against the running direction over the looper threads.



5



### **Sewing strands of beads or sequins along a folded edge**

- > Select a 2- or 3-thread flatlock seam narrow (RN) or wide (LN) depending on the diameter of the beads or the sequins and thread the machine.
- > Adjust the stitch length to 2.5 – 4 mm.
- > Adjust the cutting width according to the diameter of the beads or the sequins.
- > Raise the presser foot, place the strands of beads or sequins in the front guide groove and under the rear guide groove. The 'nap' of the sequins should face away from the foot to ensure smooth feeding.
- > To secure the strand of beads or sequins, lower the presser foot and sew a few stitches.
- > Fold the fabric (wrong side on wrong side) and place it under the presser foot and the strand. (Fig. 5)
- > Sew the strands of beads or sequins.
- > To hide the looper threads beneath the sequins, pull the sequins against the running direction over the looper threads.

