


OL/CS Height Compensating Tool

Overlocker



1

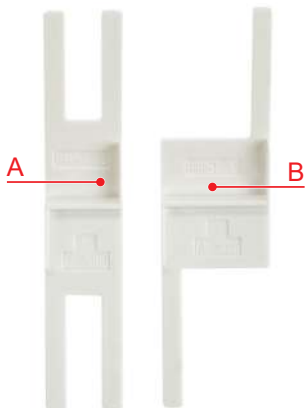

Information

Purpose

- For simple oversteitching of cross seams and trims of different heights.
- For overlock, cover and combo stitches.

For Your Safety

Before using this accessory, please read this instruction manual as well as the instruction manual of your machine carefully.

Markings and Guides

- A CS 1.5/3 mm Height Compensating Tool for Cover Stitches
- B OL 1.5/3 mm Height Compensating Tool for Overlock/Combo Stitches

2



3



4



Application

Sewing over Thick Layers of Fabric

- > Position the start of the fabric underneath the presser foot directly in front of the needles or, with thick layers of fabric, sew until the presser foot is at an angle. (Fig. 2)
- > Lower the needles into the fabric using back-kick.
- > Raise the presser foot.
- > Push the height compensating tool underneath the presser foot from the rear at a suitable height. (Fig. 3)/ (Fig. 4)
- > Lower the presser foot and continue sewing.
 - Continuing to sew will move the height compensating tool away backward underneath the presser foot by means of fabric transport.