


Men's shorts "Henning"

Model 223-27

Size 48-56

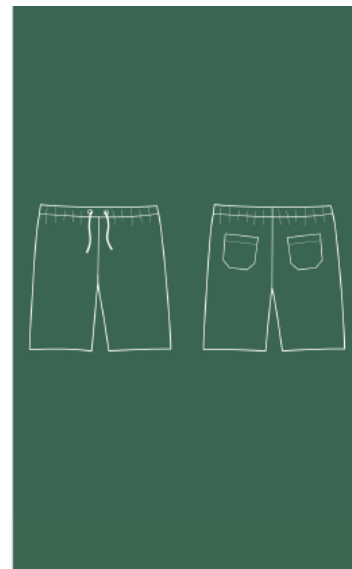

PRINT THE CUT

1. Open the pattern PDF and set the control square to Page 1 with the setting "Original size" on DIN Print A4 paper (US-Letter). (Do not click on "Adjustment to page size"!))
2. Check the square – if it is 10×10 cm, print out the whole cut sheet.
3. Place all pages next to each other as indicated by the arrows and adhere them row by row along the boundary lines, then glue the rows together.
4. Compare the body measurements with the table measurements and cut out the cut parts in the appropriate size. (The overview of the cut parts is on the pattern sheet.)

Important: Instructions do not include seam allowances, unless otherwise indicated!

SUPPLIES

- 1.1–1.4 m cotton elastane, 145 cm wide
- Remnant of woven interlining G 700 (Vlieseline)
- Eyelet Embroidery Attachment or 2 eyelets
- 0.9–1.1 m elastic, 3.5 cm wide
- 1.6 m cord
- BERNINA [Overlocker L 860](#)

CUTTING

- 1 2× front part
- 2 2× back part
- 3 2× pocket

Waistband: 100/105/110/114/120/128×8 cm, final width 4 cm.

INSTRUCTIONS

1. Hem the upper edges of the pockets and topstitch them with the allowances folded in onto the back parts.
2. Close the side seams, iron the allowances to the wrong side and topstitch them from the right. Close the front centre seam, the rear seam at the lower back and the inner leg seams. Hem the boxer shorts.
3. Iron the waistband lengthwise along the fold. Mark the centre front, from there mark the position for the eyelets on the outer side of the waistband, 2 cm from the top edge and 2 cm from the centre front each. Iron some interlining on the wrong side of the fabric. Using the Eyelet Embroidery Attachment, sew two eyelets or work in two eyelets. Place the lower edges of the waistband on top of each other and sew the waistband along the upper edge. Insert the elastic and sew it together at the width desired. Topstitch the elastic at the top and bottom at a distance of approx. 1 cm each through all layers, stretching the waistband so that it lies flat on the machine. Feed the cord through the eyelets centrally in between the stitch lines. Knot the ends.



made to create **BERNINA**